

## Tough chemical protection unparalleled comfort



Nitrile +  
Neoprene

- Three layer design for superior protection against harsh chemicals including acids, solvents and bases
- Thin mil construction provides enhanced tactility and dexterity
- Extra soft material and ergonomic design for outstanding fit, feel and flexibility for longer wear time
- Lower acceptable pinhole rate (0.65 AQL) and extended cuff for reliable protection against hazardous substances
- Silicone free formulation and processing ensure better product protection




### Industries

- Aerospace
- Automotive
- Chemical
- Electronics
- Life Sciences
- Machinery and Equipment
- Metal Fabrication
- Recycling & Waste Disposal

### Applications

- Blending, compounding materials
- Handling aerospace equipment & parts
- Handling of painting tools including spray guns and robots
- Handling unexpected leaks, spills or other releases
- Maintenance and equipment clean up
- Mounting & dismantling, assembly
- Petrochemicals processing
- Routine & experimental testing
- Sample taking & lab processing
- Transferring liquid & solids

### Innovative 3 Layer Design\*

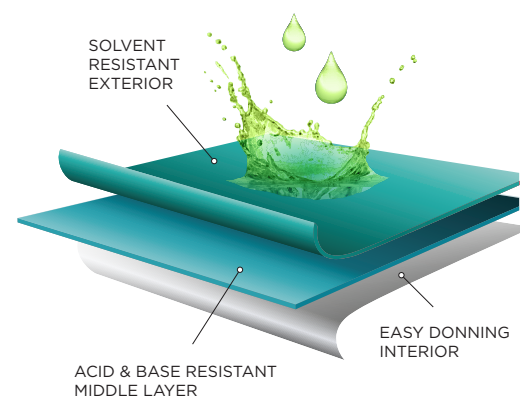

\* The method used to produce this 3 layer design is patent pending.

## TECHNICAL DATA SHEET:

### PRODUCT INFORMATION:

	<b>93-260</b>
<b>Material</b>	Nitrile + Neoprene
<b>Colour</b>	Green outside, blue inside
<b>Glove Design</b>	Ambidextrous, Powder-Free, Textured fingers, Heavy Weight Product
<b>Cuff</b>	Beaded
<b>Manufacturing/ QMS Audit Standards</b>	ISO 9001
<b>Regulatory/ Standards Compliance</b>	COMPLIANT WITH ASTM D 3577, TYPE II, PPE 2016/425, EN 420, EN ISO 374, CATEGORY III
<b>Packaging</b>	50 gloves per dispenser box, 10 dispenser boxes in a shipper box
<b>Storage</b>	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
<b>Country of Origin</b>	Sri Lanka
<b>User Needs Segment</b>	High Risk Glove - Extended cuff gloves to provide additional protection for the wrist and forearm.

### PHYSICAL PROPERTIES:

	TYPICAL VALUES						TESTING METHOD
	5.5 - 6 XS	6.5 - 7 S	7.5 - 8 M	8.5 - 9 L	9.5 - 10 XL	10.5 - 11 XXL	
Length (mm)	300	300	300	300	300	300	ASTM D3767/EN 420
Average Palm Width	78	89	98	111	116	122	
Freedom from Holes (Inspection level I)	0.65 AQL						ASTM D6319-10/ ASTM D5151-06 (2011)
Palm Thickness Single Wall	0.198mm						ASTM D3767/EN 420
	BEFORE AGING			AFTER AGING			
Ultimate Tensile Strength	22 Mpa			26 Mpa			ASTM D6319-10
Elongation at Break (%)	620			520			ASTM D6319-10
Force at break (N)	16			17			ASTM D6319-10

### ORDERING INFORMATION:

	SIZE	5.5 - 6 XS	6.5 - 7 S	7.5 - 8 M	8.5 - 9 L	9.5 - 10 XL	10.5 - 11 XXL
93-260	REORDER NO.	93260060	93260070	93260080	93260090	93260100	93260110

Ansell, \* and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2018 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

#### About Ansell

Ansell is a world leader in providing superior health and safety protection solutions that enhance human well-being. With operations in North America, Latin America/Caribbean, EMEA and Asia, Ansell employs nearly 14,000 people worldwide and holds leading positions in the personal protective equipment and medical gloves market, as well as in the sexual health and well-being category worldwide. Ansell operates in four main business segments: Medical, Industrial, Single Use and Sexual Wellness. Information on Ansell and its products can be found at [www.ansell.eu](http://www.ansell.eu).

For additional information visit us at [www.ansell.eu](http://www.ansell.eu), or call us at

**Ansell Healthcare Europe NV**  
Riverside Business Park  
Blvd International, 55  
1070 Brussels, Belgium  
Tel. +32 2 528 74 00  
Fax +32 2 528 74 01  
E-mail [info.europe@ansell.com](mailto:info.europe@ansell.com)

#### Performance Standards



#### Regulatory Compliance

